




DATA SHEET

Motor starters

FPZ STANDARD MOTOR STARTERS ARE A SIMPLE AND INEXPENSIVE WAY TO SAFELY START SINGLE PHASE OR THREE PHASE MOTORS.

THE CONTACTOR AND OVERLOAD ARE MOUNTED IN AN ENCLOSURE WITH A PUSH BUTTON ON / OFF SWITCH.

RELAY CONNECTIONS, REMOTE STARTING OR OPTIONAL COIL VOLTAGES ARE AVAILABLE UPON REQUEST.

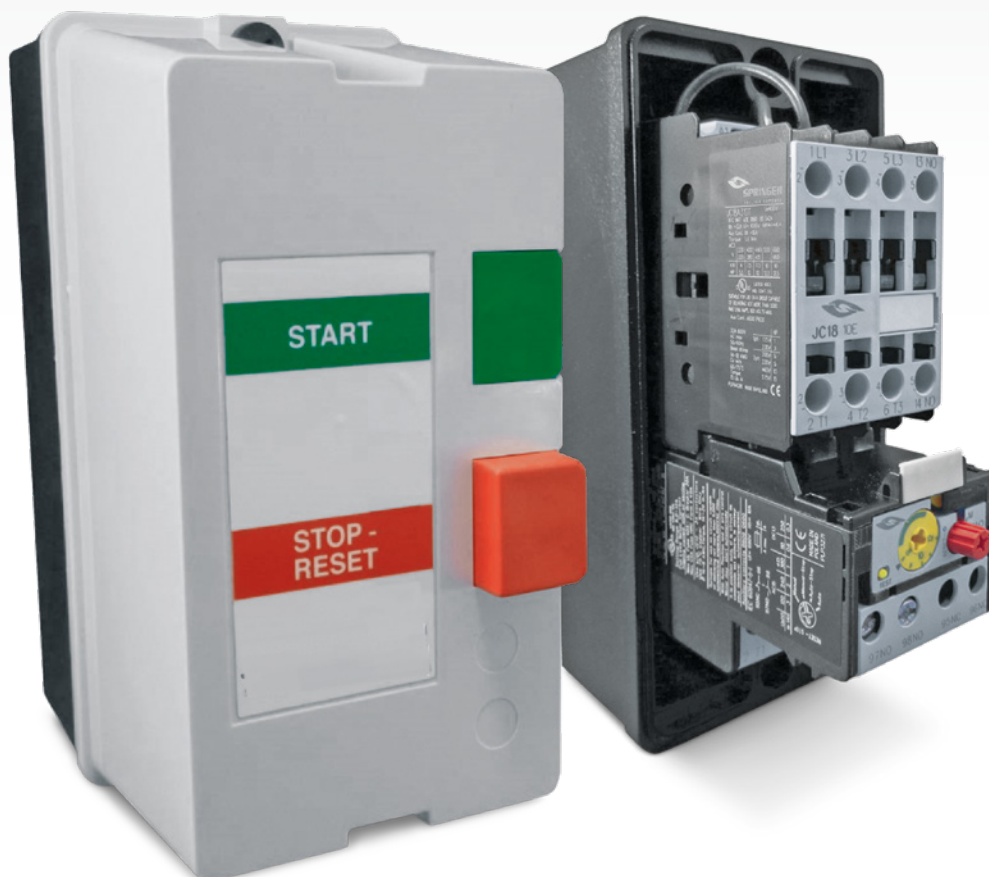

Description and Features

- Direct On-Line Starters in polycarbonate enclosure Rated Nema 4
- All contactors and overload relays are UL approved
- AC 3 phase Inductive Motor rating from 9 amp through 80 amp
- Fully assembled single and three phase starters
- No cover wiring required
- "Start-Stop" or "Reset" external buttons come standard



Technical specifications

3 Motor Starters

Model	HP	Voltage	HZ	Contactor size	Overload
AF0906P1G-3E	2	208V-230V	60	9A	5.7A - 7.6A
AF1206P1G-3F	3	208V-230V	60	12A	7.6A - 10A
AF2606P1M-3I	5.5	208V-230V	60	26A	16A - 20A
AF2606P1M-3J	7.5	208V-230V	60	26A	20A - 24A
AF3806P1M-3K	10	208V-230V	60	38A	24A - 29A
AF5206P1K-3Q	15	208V-230V	60	52A	36A - 47A
AF6506P1K-3R	20	208V-230V	60	65A	44A - 53A
AF8006P1K-3W	25	208V-230V	60	80A	57A - 68A
AF0906P1G-4F	5.5	460V	60	9A	7.6A - 10A
AF1606P1G-4G	7.5	460V	60	16A	10A - 13A
AF1606P1G-4H	10	460V	60	16A	10A - 16A
AF2606P1M-4I	15	460V	60	26A	16A - 20A
AF3806P1M-4K	20	460V	60	38A	24A - 29A
AF5206P1K-4P	25	460V	60	52A	30A - 40A

Optional

- Different coil voltages are available for remote starting.
- 24 VDC or 115VAC coil voltages
- Configuration for remote start
- Terminal strip for thermal protector connection



SIMPLIFIED FLUID HANDLING

FPZ, Inc
650 North Dekora Woods Blvd.,
Saukville, WI 53080, U.S.A.

Tel +1 262 268-0180
usa@fpz.com
www.fpzusa.com