


INSTRUCTION MANUAL FOR LINEAR COMPRESSORS

MODEL : JDK-20

JDK-30

JDK-40

JDK-50

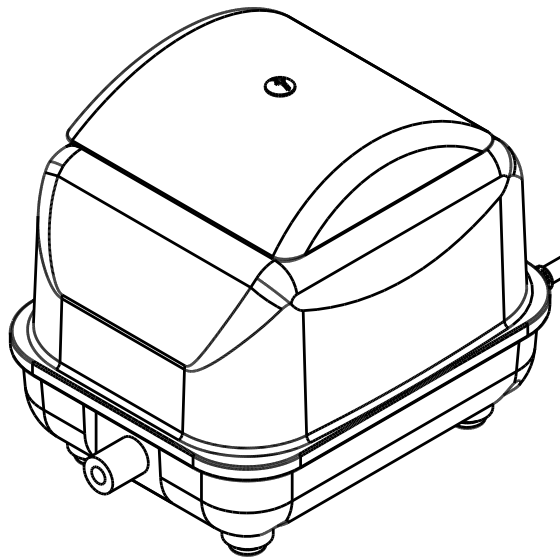

READ AND FOLLOW ALL SAFETY INSTRUCTIONS.
KEEP THIS MANUAL FOR FUTURE REFERENCE.


SECOH

SECOH SHANGHAI MEC LTD

CONTENTS

| | |
|--|-----------|
| 1. Parts name | 2 |
| 2. Instructions | |
| 2-1 Prior To Operation | 3 |
| 2-2 Storage and Transfer | 3 |
| 2-3 Installation | 4 |
| 1) Location | 4 |
| 2) Grounding | 5 |
| 3) Mounting | 5 |
| 4) Plumbing | 6 |
| 5) Operation | 6 |
| 3. Periodic maintenance | |
| 3-1 Filter element cleaning | 7 |
| 3-2 Replacement of filter element, filter cover packing, valve box, diaphragm | 7 |
| 3-3 Automatically reset thermal protector | 8 |
| 4. Trouble shooting | 9 |
| 5. Replacement parts | 9 |
| 6. Specifications | 10 |

Parts name

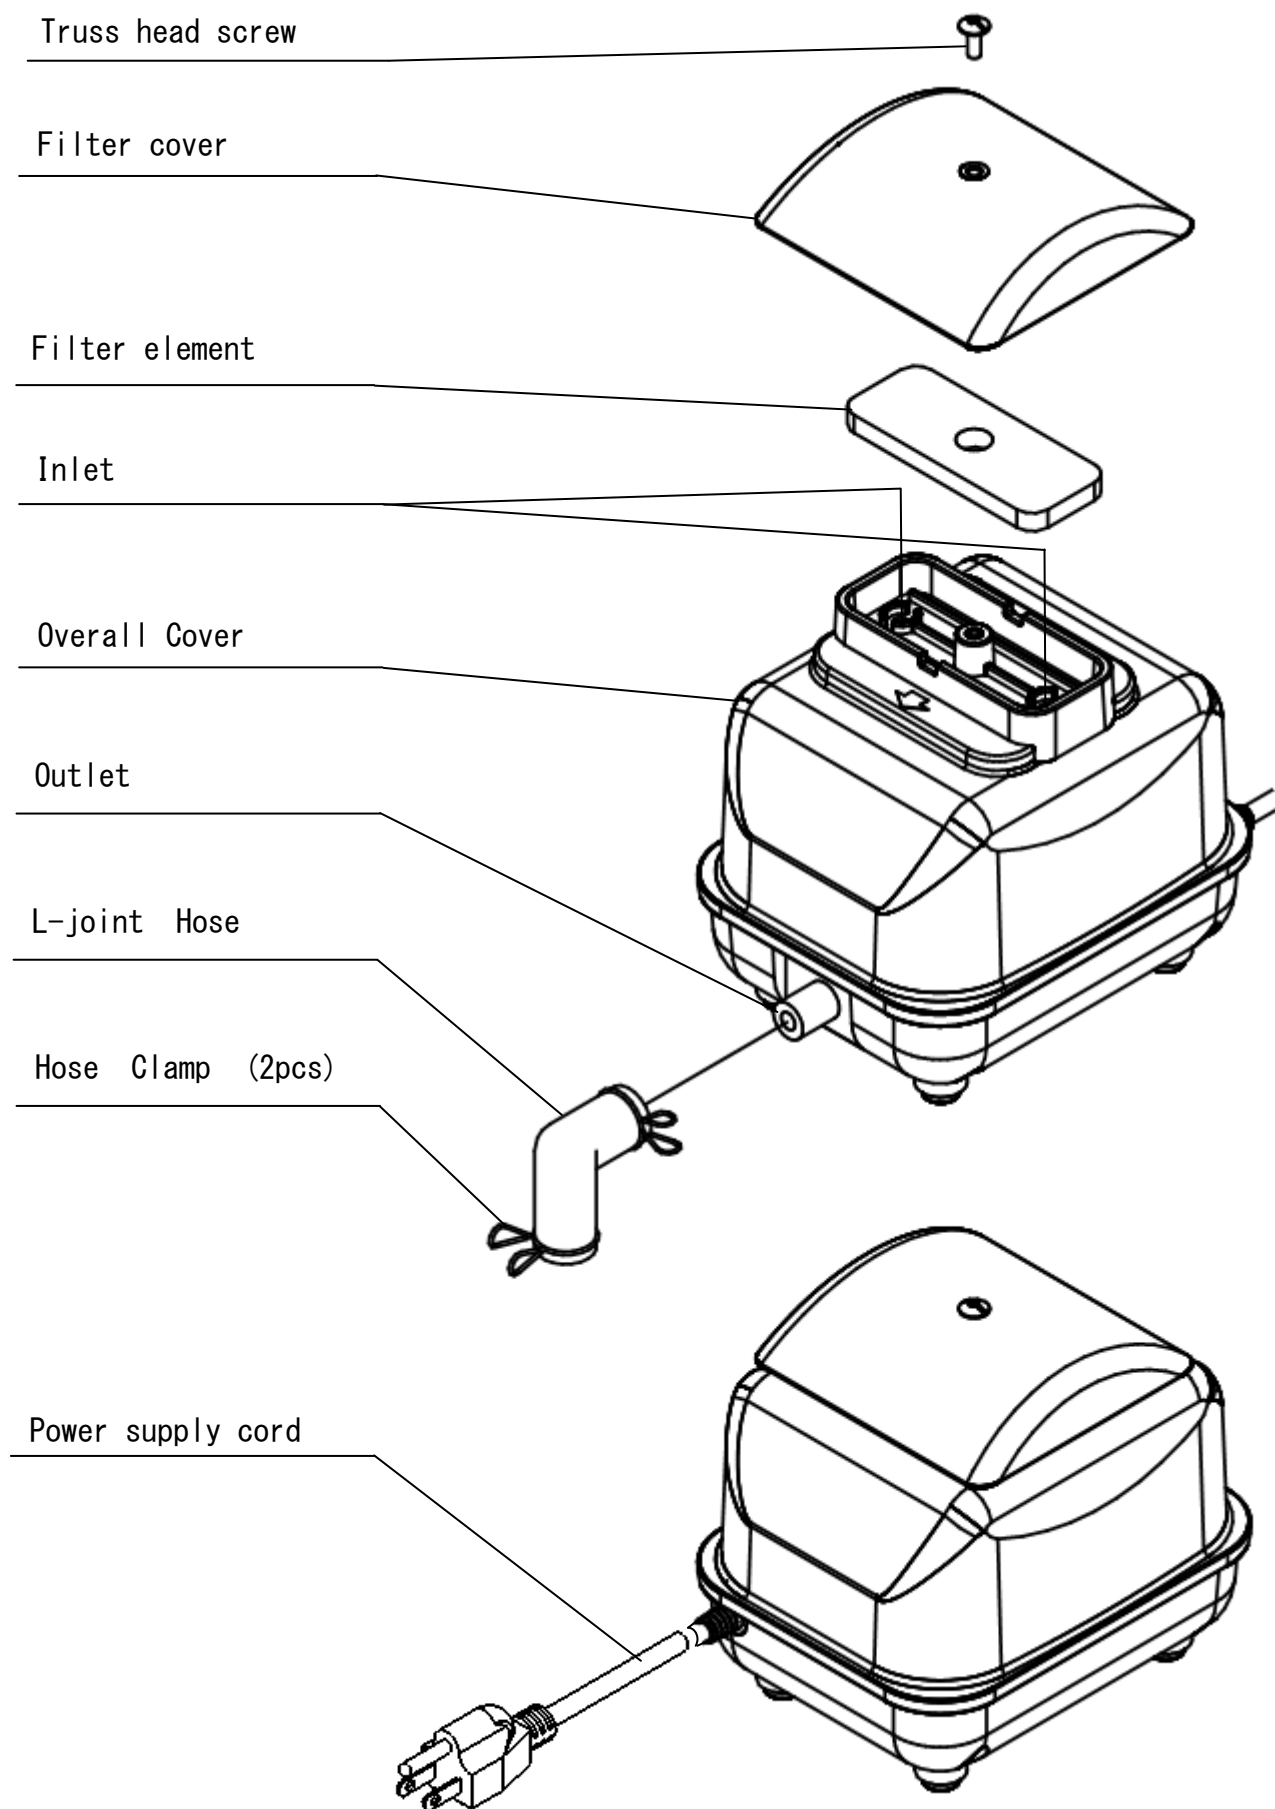

2. Instructions

- Read information carefully to ensure that this product operates correctly.
- Follow the safety instructions.
- Any servicing other than that recommended in this manual should be performed by an authorized service facility.

The following is an explanation of the three different types of hazards.



DANGER

Severe personal injury or death will occur if hazard is ignored.



WARNING

Severe personal injury or death can occur if hazard is ignored.



CAUTION

Minor injury or property damage can occur if hazard is ignored.

2-1 Prior to operation



WARNING

- This product is designed for air only.
 - To reduce the risk of ignition, electric shock or short circuit, do not pump flammable gas or liquid. Pumped fluid passes through the live parts.
- To avoid electric shock or short circuiting, connect this product to the supply voltage specified on the name plate.
- Close supervision is necessary when any appliance is used by or near children.

- This product is not designed for mounting on a vehicle.

2-2 Storage and transfer



WARNING

- Carry this product by both hands.
 - Do not carry this product by holding filter cover. The body which may slip from the filter cover can cause injury.
 - To avoid damage on wire, do not carry this product by holding the power supply cord.
- Pump surfaces can get very hot during operation. Do not touch hot surfaces until they cool.

- Do not store this product in temperatures below 14°F (-10°C). Failure to do so could result in decrease of air flow due to magnet deterioration.
- Store this product indoors out of the weather to avoid the deterioration of rubber parts.

2-3 Installation



WARNING

- Installation of this product including wiring and plumbing should be done by our distributor or specialist.
- Carefully examine the pump after installation. It should not be plugged in if there is water on parts not intended to be wet.

1) Location



WARNING

- To avoid short circuit or electric shock do not install this product in an area where it could be immersed in water or other liquids.
- Install this product above the water level to ensure no siphoning can occur if power should fail. Failure to do so will result in short circuit or electric shock by run back liquid into this product.



DANGER

- To avoid ignition do not install this product in an area where it could come in contact with flammable or explosive gas.


- Install this product in the shade and well-ventilated area.
 - The heat of sunlight may shorten diaphragm and valve life due to very high temperatures.
- Do not install this product in a humid or dusty area.
 - Overheating caused by a clogged filter may result in shortened diaphragm and valve life.
- Install this product in an area where maintenance can be easily performed.

2) Grounding



DANGER

- Improper installation of the grounding plug can result in a risk of electric shock. If repair or replacement of the cord or plug is necessary, do not connect the grounding wire to either flat blade terminal. The wire with insulation having an outer surface that is green, with or without yellow stripes, is the grounding wire.
- This product should be grounded. In the event of an electrical short circuit, grounding reduces the risk of electric shock by providing an escape wire for the electric current. This product is equipped with an electric cord having an equipment grounding conductor and a grounding type plug. The plug must be plugged into an outlet that is properly installed and grounded in accordance with all appropriate codes and ordinances.
- This product is for use on a nominal 120V volt circuit, and has a grounding plug. Make sure that the product is connected to an outlet having the same configuration as the plug as follows. No adapter should be used with the product.

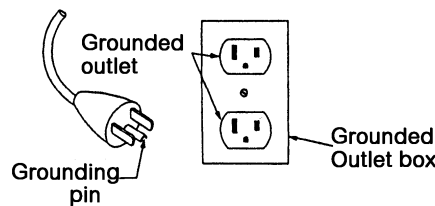

- Use only 3-wire outdoor use extension cord that has a 3-blade grounding plug, and a 3-slot receptacle that will accept the plug on the product. Make sure your extension cord is in good condition. When using an extension cord, be sure to use one heavy enough to carry the current your product will draw. For lengths less than 50 feet, 16AWG extension cords should be used. An undersized cord will cause a drop in line voltage resulting in loss of power and overheating. The extension cord should be marked “for outdoor use”.

3) Mounting



WARNING

- This product must be weather protected to avoid risk of electric shock or short circuit if it is mounted in an area exposed to water or other liquids.
- Ensure this product is securely mounted prior to operation.



CAUTION

- The ambient temperature should not be over 104°F (40°C).
 - Cooling fan is recommended to be installed when mounting in an area of higher temperature.
- This product should be mounted on a horizontal, stable and rigid surface for appropriate operation.

4) Plumbing

- Connect the pumps exhaust port and rigid plastic pipe VP13 (ID 13mm x OD 18mm) with an L-joint hose.
 - Plumbing with smaller diameter pipe may cause excess pressure and heat which will shorten the diaphragm and valve life.
 - Be sure to secure connection with a hose clamp (Ref: Fig 1).
 - Do not twist the hose elbow.
- The length of plumbing should be as short and straight as possible.
 - If the plumbing length is over 16.4ft. (5m), consult our distributor.
- Make sure that nothing remains in the pipe during plumbing.
 - If foreign material is left, it may cause excess pressure and heat which will shorten the diaphragm and valve life.




Fig.1

5) Operation



DANGER

- To avoid the risk of fire or electric shock do not modify, heat or pull the power cord.
- Do not put a heavy load on the power cord. The power cord may be damaged, if hazard is ignored.
- Clean electric source plug connectors once a year and plug in securely.
 - Dust on source plug connectors or improper plugging can cause fire or electric shock.



WARNING

- Do not touch the electric source plug with wet hands.
- Grasp plug to remove power cord from the outlet. Do not remove by pulling on power cord.
- Do not operate if the cord or plug is damaged, or if this product is malfunctioning, dropped, or damaged in anyway.

3. Periodic maintenance



WARNING

- Always disconnect power before servicing. Failure to do so could result in electrical shock, personal injury or death.



CAUTION

- Clean the filter element quarterly. A clogged filter element can cause overheating or pump failure.

3-1 Filter element cleaning

- Undo the truss head screw and remove the filter cover (Ref.:Fig.2-A).
- Remove the filter element and shake out the dust by hand. If it is heavily clogged, wash it with a neutral detergent. Rinse with water and dry it in the shade
- Reassemble the filter element back in place and press in the filter cover.
- Fix the filter cover by the truss head screw.

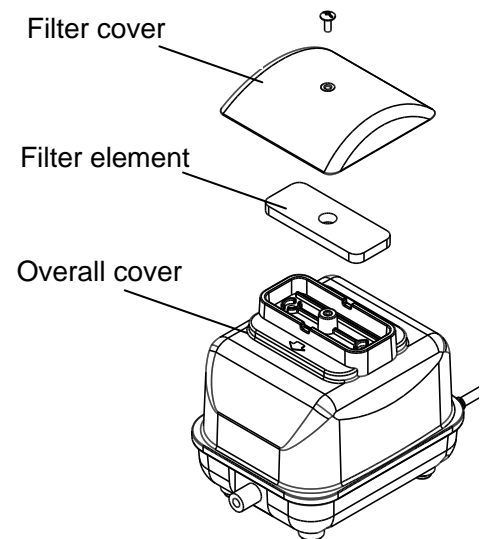


Fig 2-A

3-2 Replacement of filter element, valve box, diaphragm

- Replace the filter element following the procedure in 3-1 filter element cleaning.
- Undo the screws (A) and remove the overall cover and overall cover packing. (Ref: Fig 2-B)

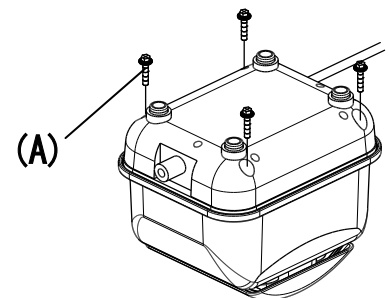


Fig 2-B

- Undo the screws (B) and remove the holder cover. (Ref: Fig 2-C)
- Undo the screws (C) and replace the valve box of both sides. (Ref: Fig 2-C)
- Undo the nuts (D) and remove diaphragm holders and diaphragms from the magnet. (Ref: Fig 2-D)
- Set the new diaphragm holders and diaphragms and fasten them with the nuts. (D). (Ref: Fig 2-D)

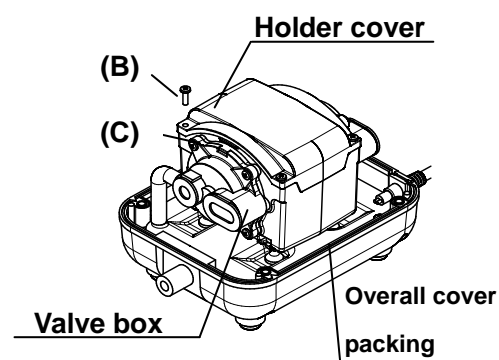


Fig 2-C

Notes:

Use the new nuts (D) in the repair kit.
Note the locating notch for reassembly.

- Assemble by reversing the disassembly procedure.

Notes:

Keep the magnet from touching the solenoids.

- Check airflow and sound level before installation.

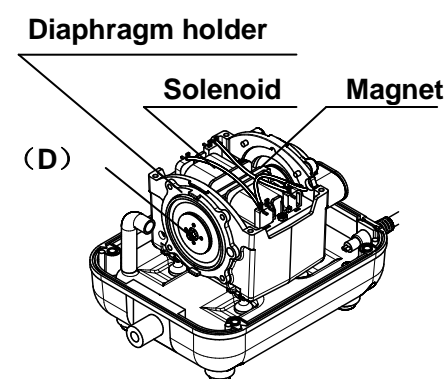


Fig 2-D



WARNING

- If the magnet contacts the solenoids during operation, it will cause damage on parts, abnormal heat, and short circuiting.



DANGER

- Do not touch live parts. Touching live parts will result in electric shock.

3-3 Automatically reset thermal protector

An automatically reset thermal protector installed on the solenoid stops pump operation if solenoid temperature becomes over $130 \pm 5 \text{ }^{\circ}\text{C}$. When the solenoid temperature cools down to $85 \pm 15 \text{ }^{\circ}\text{C}$, the protector is reset automatically and pump operation restarts.

4. Trouble shooting

| Observation | Possible cause | Action |
|---|--|--|
| Pump does not operate. | <ul style="list-style-type: none"> ▪ Improper electrical connection | <ul style="list-style-type: none"> ▪ Check plug and outlet and plug completely. |
| Discharge air decreased. Pump surface is abnormally hot. Pump operates intermittently | <ul style="list-style-type: none"> ▪ Pipe or diffuser clogged ▪ Valve in plumbing shut ▪ Filter element clogged | <ul style="list-style-type: none"> ▪ Clean pipe or diffuser. ▪ Open the valve ▪ Clean filter element. |
| Pump operates but with abnormal noise. | <ul style="list-style-type: none"> ▪ Faulty valve or diaphragm | <ul style="list-style-type: none"> ▪ Replace valve and diaphragm. |

5. Replacement parts

| Kit name | Contained parts | Quantity (pcs) |
|------------------------------|-----------------------|----------------|
| Diaphragm repair kit for JDK | Diaphragm | 2 |
| | Diaphragm holder | 2 |
| | Nut | 2 |
| | Valve box | 2 |
| | Filter element | 1 |
| | Overall cover packing | 1 |

6. Specifications

| Model | | JDK-20 | JDK-30 | JDK-40 | JDK-50 |
|----------------|------|--------------|--------|--------|--------|
| Voltage | V | 110/115 | | | |
| Frequency | Hz | 50/60 | | | |
| Rated pressure | psi | 1.71 | | | 1.85 |
| | kPa | 11.8 | | | 12.7 |
| Rated air flow | LPM | 28/28 | 37/37 | 46/46 | 51/51 |
| Amperage | Amp. | 0.6 | 0.8 | 1.1 | 1.4 |
| Bore diameter | mm | OD:19 ID:7 | | | |
| Net weight | lbs. | 9.5 | | | |
| | kg | 4.3 | | | |
| Accessory | | L-joint hose | | | |

The information presented in the specification table is based on technical and test results of nominal units. It is believed to be accurate and is offered as an aid in the selection of the products. It is the user's responsibility to determine suitability of the product for intended use and the user assumes all risk and liability whatsoever in connection therewith. Environmental and application conditions may affect advertised life.

DISTRIBUTED BY

FPZ , Inc.
650 N. Dekora Woods Blvd.
Saukville, WI 53080

Tel: 262-268-0180
email: usa@fpz.com

MANUFACTURED BY

SECOH SHANGHAI MEC LTD.

Head Office : No.160 Xuanchun Road, Xuanqiao Town, Pudong New Area, Shanghai, China

Tel: +86-21-58039273
Fax: +81-21-58039265