


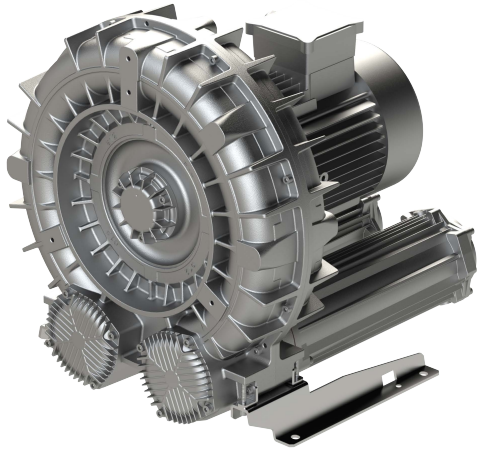



e09-MD

Evolution Series Technical Characteristics

- Premium efficient motor
- High efficiency impeller
- Mountable in any position
- Maintenance free operation
- TEFC (IP55)

Optional Features

- Anodized aluminum components for corrosion resistance
- Increased sealing

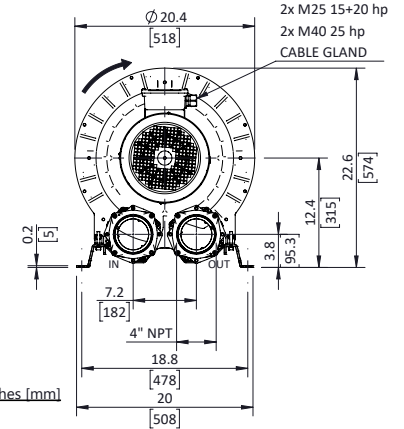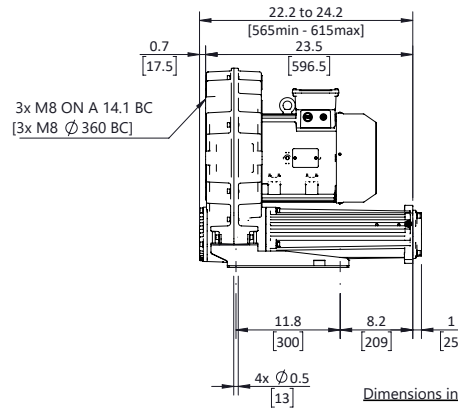

Technical Specifications

Model No.	HP	Hz	Open Flow (cfm)	Max Pressure in. H ₂ O	Max Vacuum in. H ₂ O	Efficiency	Voltage	FLA	Starting Current Ratio ¹	dB(A) ²	Weight (lb)
SCL e09-MD-10-3	10	60	245	180	190	90.2%	208-230/460	26.1-25/12.5	13	79	211.6
		50	201	240	160	90.1%	200/400	28.6/14.3		76	211.6
SCL e09-MD-10-3-575	10	60	245	180	190	90.2%	575	10	12.9	79	211.6
SCL e09-MD-15-3	15	60	245	280	-	91.0%	208-230/460	38.2-37.3/18.7	12.5	79	224.9
		50	201	-	-	91.0%	200/400	43.4 / 21.7		76	224.9
SCL e09-MD-15-3-575	15	60	245	280	-	91.0%	575	13.9	11	79	224.9

Motors include normally closed thermal protector, 1.15 S.F. (60 Hz), tropicalized windings, Class F (B) insulation, and are suitable for use with a VFD (Contact FPZ for pneumatic and speed limits when used with a VFD).

¹Starting current ratio x fla = starting current

²Noise level measured at a distance of 1 m with inlet and outlet ports piped in accordance to ISO 3744

Data is subject to change without notice.

Recommended Accessories

Description	Pressure Safety Valve	Vacuum Safety Valve	Pressure Filter	Vacuum Filter	Check Valve
Part number	VRL6 HP (15HP) ³	VRL6 ³	FS-235P-400	CT-235P-400C	CV40
	VRL6 (10HP) ³				



³Valve selections are based on 60 Hz and standard air. Valves are supplied uncalibrated. Safety valves are easy to calibrate, but can be ordered with factory calibration.





PRESSURE

VACUUM



CAPACITY

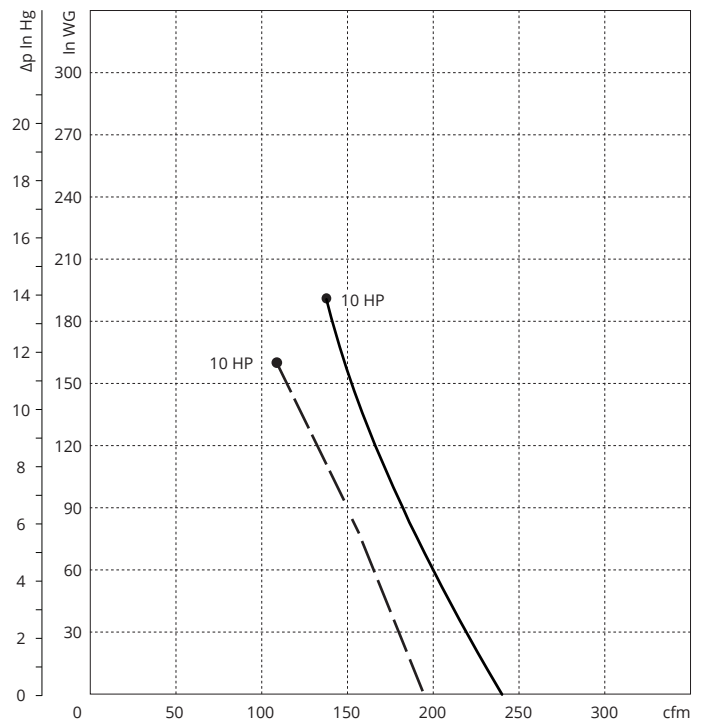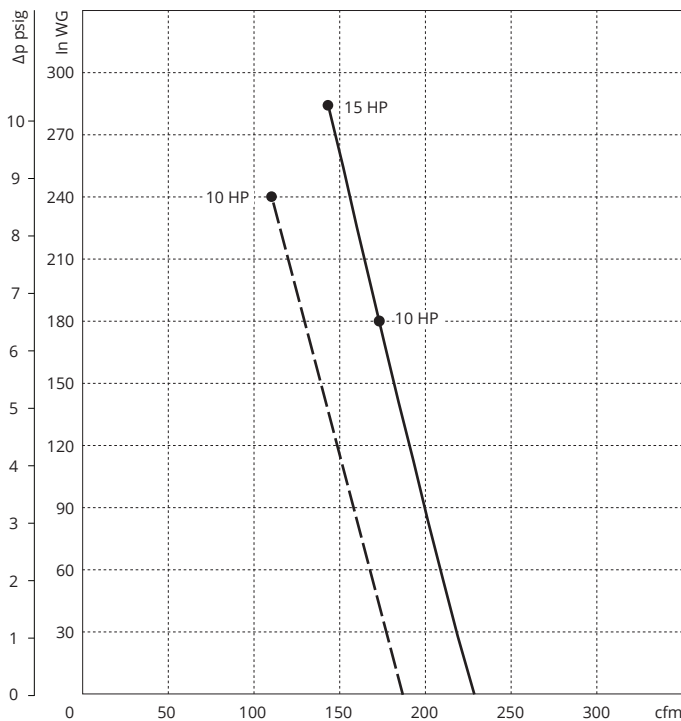

ABSORBED POWER

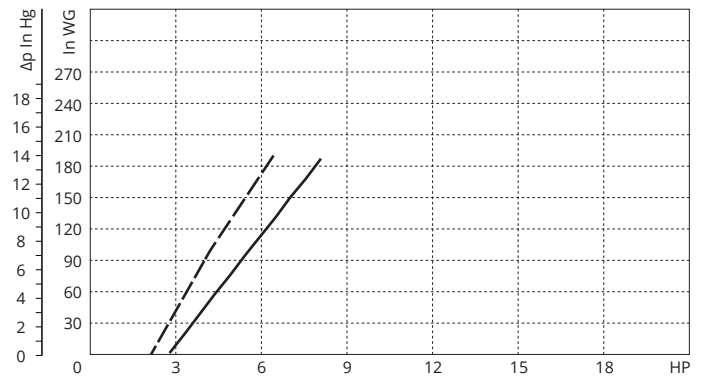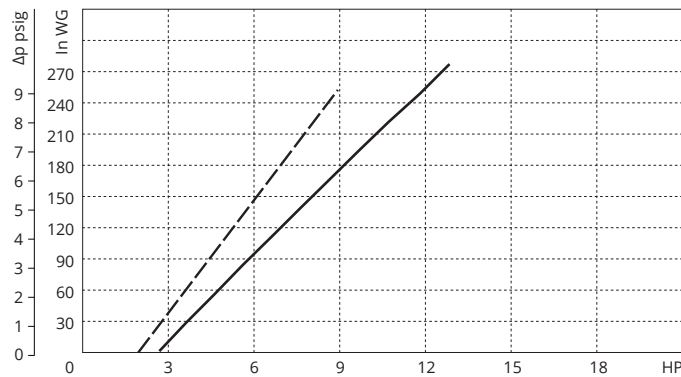

TEMPERATURE INCREASE

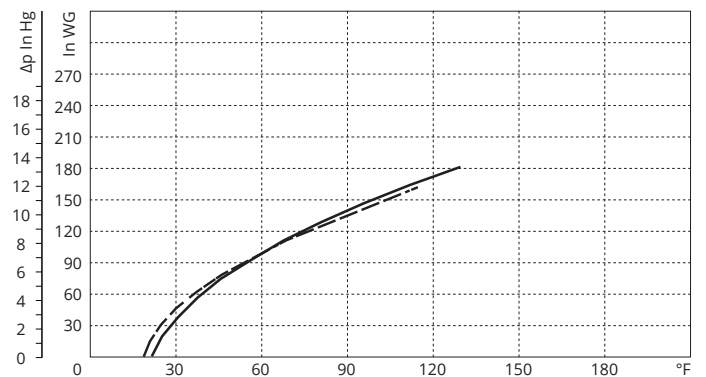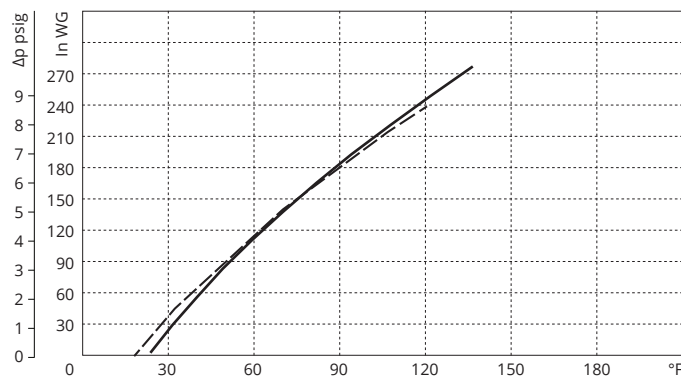

Curves refer to air at 68°F temperature and 29.92 in Hg atmospheric pressure (abs) measured at inlet port.
Values for flow, power consumption and temperature rise: +/-10% tolerance.
Data subject to change without notice.

KEY
--- 50 Hz
— 60 Hz